

# ToSee

DETECT | CONNECT | PROTECT



## GUARDIAN



Quick Guide

## Application Download

Search "Smart Life" in your mobile app store, (Google Play for Android or App Store for iOS)



Follow the app instructions to set up device or refer to enclosed Smart Life App User Manual included within your doorbell packaging.

## 2C-30B | 2C-30W

### WHAT'S INCLUDED

- 1 x Wi-Fi Video Doorbell
- 1 x USB Charging Cord
- 1 x 32GB Micro SD Card Built In
- 2 x Rechargeable Batteries
- 1 x Wall mount
- User Manuals
- Mounting Screws
- 1 x Installation Tool

### Device Requirements



Android 4.1 or higher



iOS 8.0 or higher

## Please Note

Remove both (2) green battery terminal protectors from the base of each battery.

Fully charge GUARDIAN doorbell prior to installing - use USB charging port located behind the battery plate.

Charging Time - 7 hours using 1AMP USB (via the doorbell micro USB port)


Please fully charge the 18650 batteries before use. With normal use, batteries will last between 5 to 6 months.

### Note:

If the doorbell captures an excessive number of events every day, this will consume the battery faster and will require more frequent charging. The use of Live View to check and speak through your doorbell will also increase your charge consumption rate. To reduce this you can change your motion settings to a lower sensitivity.

### WARNING


Be sure to put 18650 batteries in correct direction. Inserting batteries incorrectly can cause damage

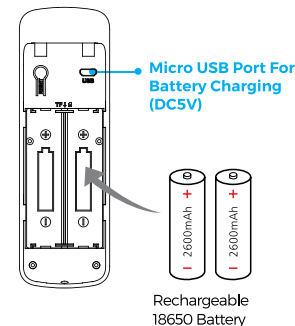

Rechargeable 18650 Battery

Note: Remove green terminal protectors from base of each battery.

## Installation

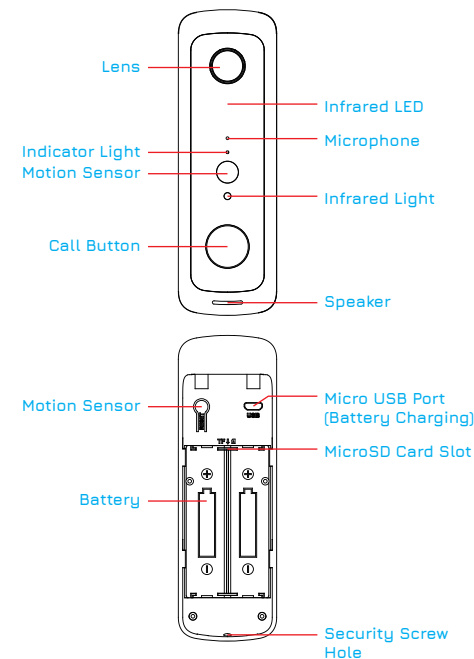

Indicator light flashing **BLUE**  
The device is waiting to begin pairing.


Indicator light flashing **RED**  
The Wi-Fi connection has failed.

Indicator light flashing **BLUE and RED**  
The Wi-Fi is disconnected.

## Installation

Place mounting plate in position and mark fixing holes with a marker, drill holes using a 6mm masonry drill bit and insert wall plugs.

Place mounting plate in place using fixings enclosed and attach to wall. Insert doorbell onto mounting plate and slide down to fix in place.

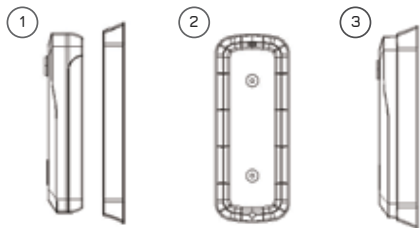

### Step 1

Remove the back bracket

### Step 2

Use 2 mounting screws to fix the back bracket onto your door or wall. You can also use double-sided tape to fix the back bracket

### Step 3

Fit the doorbell into the back bracket. Use the provided security screw to secure the doorbell so the doorbell cannot be removed easily.

### Notice


Please check live preview to find the best height to install your doorbell. We recommend not below shoulder height.

## Pairing of Chime

Connect the video doorbell to the doorbell chime and get an instant alert in your home when someone rings the doorbell. Hear the doorbell chime when you are at home without checking the video doorbell app! The chime plugs into any wall outlet so you can place it anywhere in your home.

The video doorbell is only compatible with our wireless chime and will not work with other traditional doorbell chimes. The wireless chime is optional. If the wireless chime is not installed notifications will go directly to the Smart Life app.

### Overview of the Wireless Chime

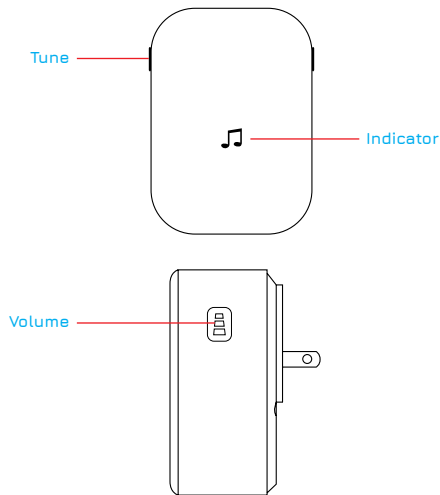


## Pairing of Chime

### Getting Started

Set up your chime with the video doorbell.


### Step 1

Before the setup process, be sure your video doorbell has connected to your phone and plug in your chime.

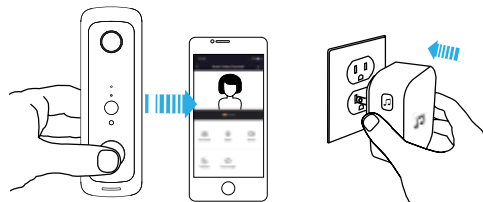

### Step 2



Press the Tune Button to cycle through 52 different tunes and select the tune you want.



## Pairing of Chime

### Step 3

Press and hold the Volume Button for 5 seconds until the blue indicator is ON.

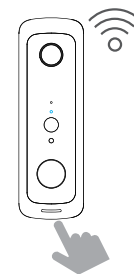

### Step 4

Press the Call Button within 5 seconds.

### Step 5

Press the Call Button again, the chime will automatically play the tune you selected.

